

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 921 667 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
09.06.1999 Bulletin 1999/23

(51) Int. Cl.<sup>6</sup>: H04M 1/60, H04M 1/72

(21) Application number: 98122977.6

(22) Date of filing: 03.12.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 05.12.1997 JP 33596797

(71) Applicant:  
PIONEER ELECTRONIC CORPORATION  
Meguro-ku Tokyo 153-0063 (JP)

(72) Inventors:  
• Endoh, Yoshiaki  
Kawagoe Koujyou  
Kawagoe-shi, Saitama-ken, 350-0822 (JP)

• Yoshida, Masao  
Kawagoe Koujyou  
Kawagoe-shi, Saitama-ken, 350-0822 (JP)  
• Kawamura, Katsuaki  
Kawagoe Koujyou  
Kawagoe-shi, Saitama-ken, 350-0822 (JP)  
• Kamiya, Kazuhiro  
Kawagoe Koujyou  
Kawagoe-shi, Saitama-ken, 350-0822 (JP)  
• Kawabata, Mika  
Kawagoe Koujyou  
Kawagoe-shi, Saitama-ken, 350-0822 (JP)


(74) Representative:  
Bohnenberger, Johannes, Dr. et al  
Meissner, Bolte & Partner  
Postfach 86 06 24  
81633 München (DE)

## (54) Vehicle-installed telephone apparatus

(57) A vehicle-installed telephone apparatus (1) comprises a portable phone (2a) with announcing means controlled by a microcomputer, running detecting means (3) which detects that a vehicle is running, incoming call detecting means (4) which detects that an incoming call is received and control means (6) which sends control signals to the portable phone (2a). The control means (6) sends control signals which invalidate the operation of the announcing means to the

microcomputer within the portable phone (2a) when the running detecting means (3) detects that the vehicle is running and the incoming call detecting means (4) detects that the incoming call is received at the same time, whereby a driver can concentrate on driving without being diverted his attention, even if an incoming call is received while driving.

FIG.1

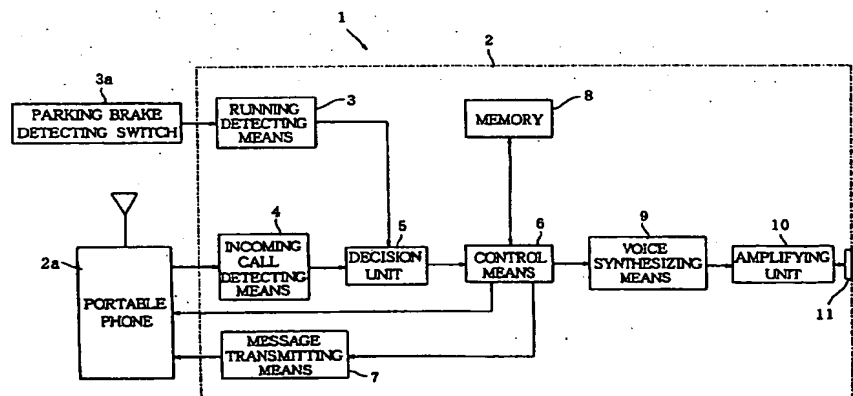

EP 0 921 667 A2

## Description

### BACKGROUND OF THE INVENTION

[0001] The present invention relates to a vehicle-  
installed telephone apparatus that is installed on vehi-  
cles and the like.

[0002] Recently, with the spread of car telephones  
and portable phones, the scene, that drivers respond to  
the incoming call of a portable phone and the like, is  
often observed on the street. Since the danger of the  
case where drivers call while driving vehicles and the  
like is well known, it has been beginning to emerge the  
necessity for taking measures that the drivers do not  
have to respond to the incoming call of the portable  
phone. Therefore, in the prior art, proposed was a vehi-  
cle-installed telephone apparatus having a function that  
when an incoming call of the telephone is confirmed  
while a vehicle is running, it is automatically switched to  
the speaking state and announces that the driver can  
not respond because of while driving, in order not to  
have to respond immediately to the portable phone,  
even if its ringing sounds are rung while the vehicle is  
running (Japanese Patent Laid-open Publication No. 7-  
115680).

[0003] In addition, there is another prior art in which  
the driver is informed that an incoming call is received  
through the direct conduction of vibration to the driver  
by means of a vibrator function of the vehicle-installed  
telephone apparatus without making ringing sounds when  
they become an incoming state.

[0004] However, the above-mentioned vehicle-  
installed telephone apparatus has a problem that the  
ringing sounds of the vehicle-installed telephone appa-  
ratus are suddenly rung or vibrations are suddenly  
started when an incoming call is received while driving.  
In other words, when a driver concentrates his con-  
sciousness on driving a vehicle, he/she would be  
instantaneously surprised by suddenly making ringing  
sounds or starting vibration, and while he/she would be  
preoccupied with the vehicle-installed telephone appa-  
ratus, he/she could not concentrate on driving vehicles  
and the like. Therefore, he/she would become scatter-  
brained and enter in a very dangerous condition.

### SUMMARY OF THE INVENTION

[0005] Accordingly, an object of the present invention  
is to provide a vehicle-installed telephone apparatus  
which can particularly make a driver be able to concen-  
trate on driving vehicles and the like without preoccupy-  
ing with the vehicle-installed telephone in view of the  
problems in the prior arts of the vehicle-installed tele-  
phone apparatus.

[0006] According to the present invention, there is pro-  
vided a telephone apparatus, which is installable on  
vehicles, and comprises running detecting means for  
detecting that the vehicle is running, incoming call

detecting means for detecting that an incoming call is  
received, announcing means for announcing that the  
incoming call has been received, and control means for  
controlling the announcing means. When the running  
detecting means detects that the vehicle is running and  
the incoming call detecting means detects that the  
incoming call is received at the same time, the control  
means controls in such a manner as to invalidate the  
operation of the announcing means, which is controlled  
by a microcomputer built in a portable phone. Accord-  
ingly, the driver is not bothered with the ringing sound of  
the portable phone while driving and can concentrate  
on driving, thereby the safety of driving is improved.

[0007] It is a further object of the present invention to  
provide the vehicle-installed telephone apparatus, fur-  
ther comprising message transmitting means controlled  
by the control means. The control means controls in  
such a manner as to send messages stored in the mes-  
sage transmitting means when the running detecting  
means detects that the car is running and the incoming  
call detecting means detects that the incoming call is  
received at the same time. Because of this, it is possible  
to announce that the driver can not answer the incoming  
call because of while driving, and the sending-side can  
avoid being worried because the sending-side can know  
the reason why the driver can not answer the incoming  
call.

[0008] It is another object of the present invention to  
provide the vehicle-installed telephone apparatus fur-  
ther comprising voice synthesizing means controlled by  
the control means and a memory where data of incom-  
ing call records is stored. The control means controls in  
such a manner that messages on the basis of the data  
of incoming call records stored in the memory are con-  
verted into voice by the voice synthesizing means, and  
that the voice is output, when the running detecting  
means detects that the vehicle is not running. There-  
fore, the driver can know immediately that incoming  
calls are received, because the data of incoming call  
records is read out automatically when the vehicle is  
stationary, and can deal with them by calling back from  
the vehicle-installed telephone apparatus.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0009] The present invention, together with objects  
and advantages thereof, may best be understood by ref-  
erence to the following description of the presently pre-  
ferred embodiments together with the accompanying  
drawings in which:

Fig. 1 is a schematic diagram for explaining a sys-  
tem of a vehicle-installed telephone apparatus  
according to the present invention, and  
Figs. 2a and 2b are flow chart diagrams illustrating  
a basic operation of the vehicle-installed telephone  
apparatus shown in Fig. 1.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0010] Referring to Fig. 1, a reference numeral 1 denotes a vehicle-installed telephone apparatus. The vehicle-installed telephone apparatus 1 comprises a main body 2 of the apparatus, a portable phone 2a with announcing means controlled by a microcomputer, and a parking brake detecting switch 3a. Within the main body 2, there are provided running detecting means 3 that detects whether the vehicle is running or stationary according to a signal from the parking brake detecting switch 3a, incoming call detecting means 4 that detects whether the portable phone 2a receives an incoming call or not, a decision unit 5 where each of signals from the running detecting means 3 and the incoming call detecting means 4 are input, and control means 6. The decision unit 5 makes a decision whether any incoming calls are received by the portable phone 2a or not, and under what kind of vehicle conditions they are received, and then output signals of the decision are output to the control means 6. The control means 6 controls a plurality of means, which are described later, provided inside the main body 2 of the apparatus according to the output signals from the decision unit 5. Output signals from the control means 6 can be fed to message transmitting means 7 which previously holds messages such as that the driver can not answer to a sending-person because of while driving to transmit the messages, a memory 8 where data of incoming call records is stored, and voice synthesizing means 9 which convert messages according to the data of incoming call records into voice. Particularly, the control means 6 and the memory 8 are allowed to input and to output signals between the both means, and the memory 8 is provided with not only the function of storing the data of incoming call records but also the functions of an automatic sound recording, forming read-out data lists of the incoming call records and memorizing them. The output signals of the message transmitting means 7 are input to the microcomputer of the portable phone 2a. Additionally, the control signals from the control means 6 are also directly input to the microcomputer of the portable phone 2a. Depending on the control signal from the control means 6 received by the microcomputer of the portable phone 2a, the microcomputer of the portable phone 2a controls the announcing means of the portable phone 2a so as to be brought into operation or not. Moreover, the voice signals from the voice synthesizing means 9 is input to an amplifying unit 10, and then it is output from a speaker 11.

[0011] Next, the basic operation of the vehicle-installed telephone apparatus 1 according to the present invention will be explained by means of the flow chart in Figs. 2a and 2b.

[0012] At step 1, whether an incoming call to the portable phone 2a is present or absent is judged. If the incoming call is present, go to step 2 and if the incoming

call is absent, go to step 10. In the case of going to step 10, it will be described later. Next, at step 2, whether a parking brake is brought into operation or not is judged. If the operation is not detected, go to step 3 and if it is detected, go to step 5. In the case of going to step 5, it will be described later.

[0013] In the case of going to step 3, the line is connected with a sending-side without making ringing sounds of the portable phone 2a and a previously set message, for example, such as "I will call back later, because I am driving now." is replied to the sending-side without attracting the driver's attention. Next, go to step 4 and a call subscriber number, which is hereinafter referred to as a calling number, and the like are stored as incoming call records into the memory 8 which stores the data of the incoming call records. Upon hanging up at the sending-side, the call is terminated, and then the vehicle-installed telephone apparatus 1 is on standby until receiving next incoming call.

[0014] In the case of going to step 5, in order to announce that the portable phone 2a has received an incoming call, ringing sounds are rung. Next go to step 6, and if it is made a judgement that the portable phone 2a is off-hooked, go to step 7, then upon switching the portable phone 2a to the speaking mode, the portable phone 2a is turned in normal speaking condition. If it is made a judgement that the portable phone 2a is not off-hooked, go to step 8, then the ringing sounds are rung until a predetermined time  $T_s$  has elapsed. After the predetermined time has elapsed, go to step 9, and while the portable phone 2a is switched to the automatic sound recording mode, messages from the sending-side are recorded in the memory 8. Upon hanging up at the sending-side, the call is terminated.

[0015] In the case of going to step 10, if it is made a judgement according to the output signals from the running detecting means 3 that the vehicle is stationary, go to step 11, and if the vehicle is running, then the vehicle-installed telephone apparatus 1 is on standby until receiving a next incoming call. At step 11, it is confirmed whether unread data among all data of incoming call records stored in the memory 8 is present or absent. If it is present, go to step 12, the unread data of incoming call records stored in the memory 8 is converted into voice by the voice synthesizing means 9. Then the converted voice is amplified by the amplifying unit 10, and the first calling number of the sending-side is automatically read out with the voice through the speaker 11. At step 13, if a driver selects one of these data of incoming calls and wants to originate a call to it, it can be automatically done with pushing one key. The sending-side is called up at step 14, the line is connected, the driver has a conversation at step 15, and then the call is terminated, when the driver-side or the sending-side hangs up at step 16. Then the corresponding data is deleted from the data list of incoming call records stored in the memory 8 at step 17. Next, return to step 11 in order to retrieve any unread data of incoming call records.

[0016] If the driver does not select to originate a call to the data of incoming call records at step 13, then go to step 18, where it is selected whether the corresponding data should be deleted from the data of incoming call records in the memory 8. If Yes, go to step 17. If No, go to step 19, then the corresponding data is transferred to the read-out data lists of incoming call records. When the corresponding data is deleted at step 17 or is finished transferring to the read-out data lists of incoming call records, return to step 11 in order to retrieve any other unread data of incoming call records. And the sequential processing in compliance with the flow chart from step 11 to step 19 is performed until all the unread data of incoming call records are disappeared, and if the unread data of incoming call records can not be retrieved, the processing is terminated.

[0017] Moreover, it is possible to re-originate a call from the read-out data of incoming call records. In this case, a name and a telephone number are indicated similar to the ordinary originating call from a telephone directory function of the portable phone.

[0018] Next, explained is the process in a case where the portable phone 2a receives an incoming call while a vehicle is running.

[0019] First of all, the incoming call detecting means 4 connected with the portable phone 2a outputs the signals received by the portable phone 2a to the decision unit 5. When the decision unit 5 makes a judgement according to the output signals from the running detecting means 3 that the vehicle is running, the signals that the portable phone 2a received an incoming call while the vehicle was running, are output to the control means 6. Then, the control means 6 outputs control signals that announcement is invalidated to the microcomputer within the portable phone 2a. Since the microcomputer which received the control signals controls in such a manner as to invalidate the operation of the announcing means such as ringing sounds within the portable phone 2a, the ringing sounds of the portable phone 2a are not rung.

[0020] On the other hand, the control means 6 connects the line with a sending-side without making ringing sounds of the portable phone 2a and a previously set message, for example, such as "I will call back later, because I am driving now." is replied to the sending-side without attracting the driver's attention.

[0021] Next, the control means 6 stores a calling number and the like as incoming call records into the memory 8 which stores the data of the incoming call records. Upon hanging up at the sending side, the call is terminated, and then the portable phone 2a is on standby until receiving the next incoming call.

[0022] Further, explained is the process in a case where the portable phone 2a receives an incoming call while a vehicle is stationary.

[0023] First of all, when the portable phone 2a receives an incoming call, whether the vehicle is stationary or not is judged at the decision unit 5 according to

the signals detected by the parking brake detecting switch 3a. If it is made a judgement that the vehicle is stationary, the control means 6 outputs the control signals that the announcement such as ringing sounds is validated, to the microcomputer within the portable phone 2a. Then, since the microcomputer receiving the control signals controls in such a manner as to validate the operation of the announcing means within the portable phone 2a, the ringing sounds of the portable phone 2a are rung. Next, if it is made a judgement that the portable phone 2a is off-hooked, upon switching the portable phone 2a to the speaking mode, it is turned in normal speaking condition. If it is made a judgement that the portable phone 2a is not off-hooked, the ringing sounds are rung until a predetermined time has elapsed. After the predetermined time has elapsed, while the portable phone 2a is switched to the automatic sound recording mode, the messages from the sending-side are recorded in the memory 8, then the portable phone 2a is on standby until receiving the next incoming call.

[0024] Last, explained is the process in a case where the portable phone 2a receives an incoming call while a vehicle is running, and then the vehicle is brought into a standstill.

[0025] When it is made a judgement at the decision unit 5 according to the output signals from the running detecting means 3 that the vehicle is stationary, the control means 6 confirms whether any unread data among the data of incoming call records stored in the memory 8 is present or absent. If it is present, the unread data of incoming call records stored in the memory 8 is converted to voice by the voice synthesizing means 9, the voice is amplified by the amplifying unit 10, and then the calling number of the sending-side is automatically read out one by one with voice through the speaker 11.

[0026] If the driver selects to call to one of the unread data of incoming call records, it can be automatically done to call with pushing one key. The sending-side is called up, when the line is connected, the driver has a conversation, and then the call is terminated, while the driver-side or the sending-side hangs up. Then the corresponding data is deleted from the data list of incoming call records within the memory 8.

[0027] Then, if the driver does not select to call to the corresponding data, the driver can select to delete the corresponding data from the data of incoming call records within the memory 8, or to transfer them to the read-out data lists of incoming call records. Then, when the driver re-originate a call from the read-out data of incoming call records, a name and a telephone number are indicated similar to the case of ordinary originating a call from a telephone directory function of the portable phone.

[0028] The above-mentioned detection of whether a vehicle is running or stationary may be detected by a vehicle speed sensor, instead of the shown example of using the parking brake detecting switch 3a.

[0029] As described above, according to the present invention, even if the portable phone receives an incoming call while a vehicle is running, the driver is not bothered with the ringing sounds of the portable phone and can concentrate on driving, so that the safety can be improved since the control means provided in the vehicle-installed telephone apparatus controls in such a manner as to invalidate the operation of the announcing means controlled by the microcomputer incorporated in the portable phone. At that time, since the sending-side can know the reason why the receiving side can not answer the incoming call by automatically announcing that the driver can not answer the incoming call because of while driving to the sending-side with the control means, the sending-side can avoid being worried. Moreover, since the data of incoming call records is read out by the control means when the vehicle is stationary, the driver can know at once that any incoming calls are received, and can deal with them by calling back immediately from the vehicle-installed telephone apparatus.

[0030] While the presently preferred embodiments of the present invention have been shown and described, it is to be understood that these disclosures are for the purpose of illustration and that various changes and modifications may be made without departing from the scope of the invention as set forth in the appended claims.

#### Claims

1. A vehicle-installed telephone apparatus (1) comprising:

running detecting means (3) for detecting that a vehicle is running,

incoming call detecting means (4) for detecting that an incoming call is received,

announcing means for announcing that the incoming call has been received, and

control means (6) for controlling said announcing means, wherein said control means (6) controls in such a manner as to invalidate the operation of said announcing means, when said running detecting means (3) detects that the vehicle is running and said incoming call detecting means (4) detects that the incoming call is received at the same time.

2. The vehicle-installed telephone apparatus (1) according to Claim 1, wherein said detecting means is connected to a parking brake detecting switch (3a).

3. The vehicle-installed telephone apparatus (1)

according to Claim 1, wherein said detecting means is connected to a vehicle speed sensor.

4. The vehicle-installed telephone apparatus (1) according to Claim 1, wherein said announcing means is included in a portable phone (2a) or a car telephone.

5. The vehicle-installed telephone apparatus (1) according to Claims 1 to 4, said apparatus further comprising:

message generating means controlled by said control means, wherein said control means (6) controls in such a manner as to send messages stored in said message generating means to a sending-side, when said running detecting means (3) detects that the vehicle is running and said incoming call detecting means detects that the incoming call is received at the same time.

6. The vehicle-installed telephone apparatus (1) according to Claims 1 to 5, said apparatus further comprising:

voice synthesizing means (9) controlled by said control means (6), and

a memory (8) for storing the data of incoming call records, wherein said control means (6) controls in such a manner as to convert messages according to the data of incoming call records stored in said memory into voice and to output it, when said running detecting means (3) detects that the vehicle is not running.

7. A method for controlling

a vehicle-installed telephone apparatus, comprising the steps of  
 detecting whether the vehicle is running;  
 detecting whether an incoming call is received;  
 announcing that an incoming call has been received;  
 suppressing said announcing step if an incoming call is received during running of said vehicle.

FIG.1

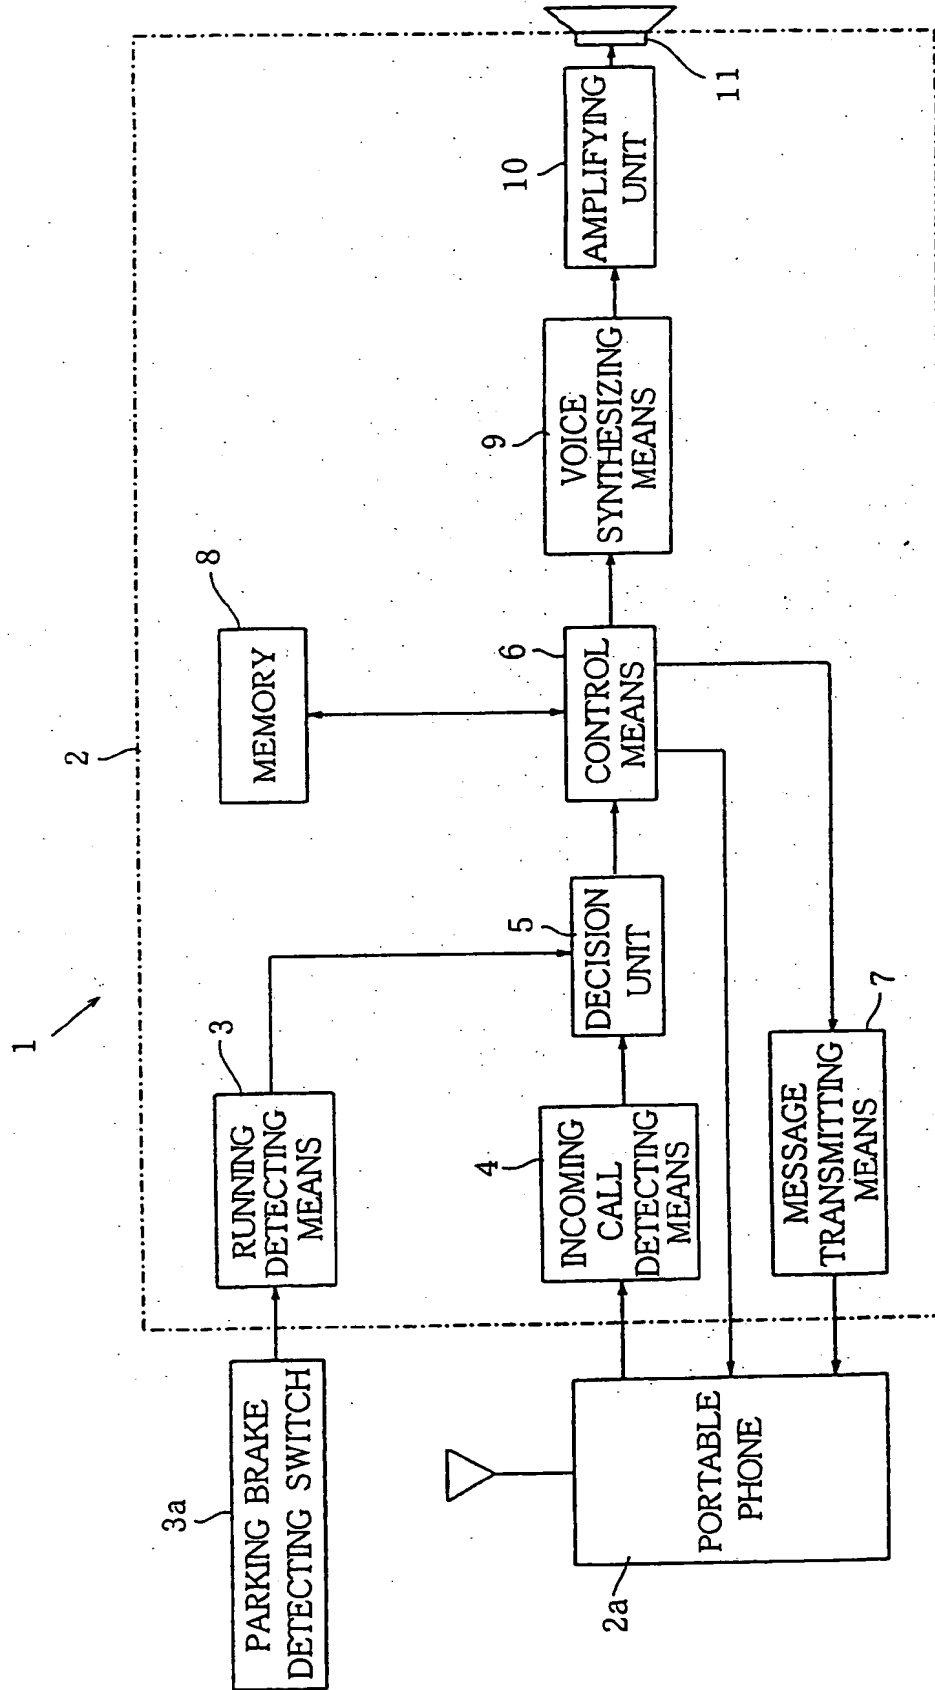


FIG.2 a

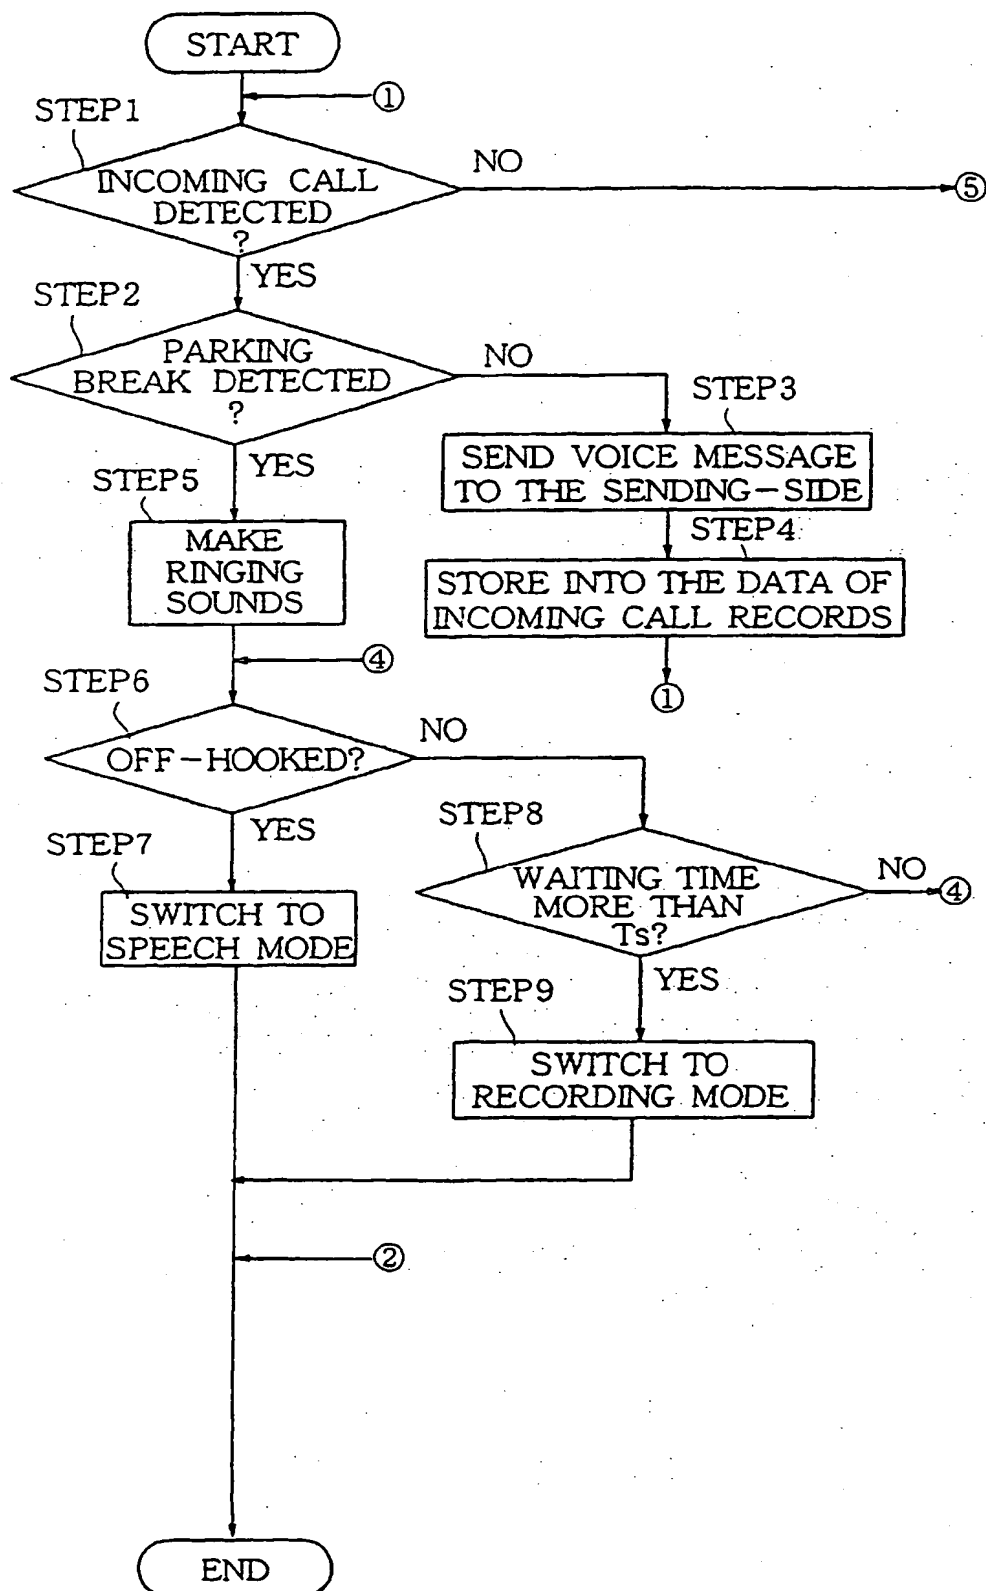


FIG.2 b

